




## Silver Double Sensor SMT Splicing Tape for FUJI GSM27 Series with PET Material

Our Product Introduction

for more products please visit us on [smtmachinepart.com](http://smtmachinepart.com)

### Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GSM2608/GSM2612/GSM2616/GSM2624
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 25\*40\*15mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days

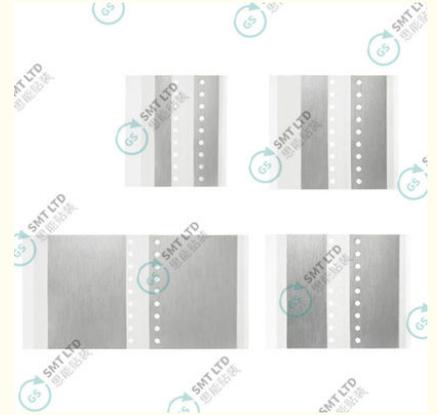

### Product Specification

- Brand Name: GS
- Material: PET
- Model Number: GSM2608/GSM2612/GSM2616/GSM2624
- Product Name: SMT Double Sensor Splice Tape
- Application: SMT Process
- Customization: Support
- Highlight: **Double Sensor SMT Splicing Tape, Silver SMT Splicing Tape, SMT FUJI Splicing Tape**



### More Images



## Product Description

### Silver Double Sensor SMT Splicing Tape For FUJI GSM27 Series

GSM27 Series Silver SMT Double Sensor Splice Tape is professionally engineered for Fuji machines with intelligent feeders. This ESD (Electrostatic Discharge) silver splice tape ensures seamless operations, minimizes downtime, and enhances productivity in electronics manufacturing.


#### Precision Engineering for Intelligent Feeders

Designed specifically for Fuji machines equipped with intelligent feeders, the GSM27 Series Special Splice Tape delivers precision, efficiency, and reliability in demanding electronics manufacturing environments.

#### Step-by-Step Application Instructions

1. Use the designated cutting tool to accurately cut the carrier tapes for perfect fit and alignment.
2. Remove the release liner of the splice tape to expose the adhesive side for secure bonding.
3. Align the cut carrier tapes (cover tape down) with the splice tape placement holes for precise positioning.
4. Place both ends of the joining carrier tapes onto the first strip of the splice tape, ensuring correct alignment.
5. Fold over the second strip of the splice tape to the underside of the carrier tape and press firmly for secure splicing.
6. Remove and discard the clear plastic cover to complete the splice, ready for assembly process.

Part (reel)	Dimensions (pc)	Package(box)
GSM2608 (8mm)	4.6/7.6mm x 36mm	500pcs
GSM2612 (12mm)	11.6/8.8 mm x 36mm	500pcs
GSM2616 (16mm)	15.6/12.8 mm x 36mm	500pcs
GSM2624 (24mm)	23.6/20.8 mm x 36mm	250pcs



#### Product Keywords & Applications

SMT double splice tape  
 SMT double splice tape for pick-and-place  
 SMT double splice tape yellow  
 Double splice tape for SMT machines  
 SMT double splice tape adhesive  
 SMT double splice tape black  
 SMT double splice tape usage guide  
 SMT double splice tape for feeders  
 High-quality SMT double splice tape  
 Double splice tape for Panasonic SMT  
 Double splice tape for Fuji SMT  
 SMT double splice tape compatibility  
 Double splice tape for high-speed SMT machines  
 SMT double splice tape performance  
 SMT double splice tape durability  
 SMT splice tape double strength



Global Soul Limited

+8613728696610

liyi@gs-smt.com

smtmachinepart.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China