



## Dual-channel Tubular Feeder with 2s/Pcs Feeding Speed and OLED Display Screen for SMT Rail Vibration Feeding

Our Product Introduction

for more products please visit us on [smtmachinepart.com](http://smtmachinepart.com)

### Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-SAT2112
- Minimum Order Quantity: 1/PCS
- Price: USD+negotiable+pcs
- Packaging Details: 1600\*90\*1250mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



### Product Specification

- Model: GS-SAT2109
- Overall Dimensions (length \* Width \* Height): 1500\*90\*1140mm
- Weight: 40KG
- Working Voltage: AC 220V
- Gas Source Requirements: 0.5-0.7Mpa
- Maximum Current: 3A
- Feeding Speed: 2s/Pcs
- Operation Panel: 1.54-inch OLED Display Screen
- Pipe Replacement Time: <6S
- Channel: Dual-channel
- Pin Bending Function: Optional Separately(Default None)
- Plastic Surgery Function: Optional Separately(Default None)
- Lifting Function: Optional Separately(Default None)
- Foot Cutting Function: Optional Separately(Default None)



### More Images



## Product Description

### Tubular Feeder (GS-SAT2112) - Rail Vibration Feeding

The GS-SAT2109/2112 Tubular Feeder is a precision electronic component supply device designed for automated insertion machines. This rail vibration feeding system delivers tube-mounted electronic components one by one at specified intervals through controlled vibration and air blowing mechanisms.

#### Product Overview





### Control Interface



### Key Features

- Precision component delivery through vibration and air blowing
- Timed component supply for automated insertion machines
- Rail vibration feeding mechanism for consistent performance
- Designed for tube-mounted electronic components
- Reliable operation in industrial manufacturing environments


### Technical Specifications

### GS-SAT2112(Monorail)

Model	GS-SAT2112	Remarks
Overall dimensions (length * width * height)	1500*76*1140mm	
Weight	35KG	
Working voltage	AC 220V	
Gas source requirements	0.5-0.7Mpa	
Maximum current	2A	
Feeding speed	2s/Pcs	
Operation panel	1.54-inch OLED display screen	
Pipe replacement time	<6S	
Channel	Single channel	Single or dual channels can be optionally equipped
Pin bending function	Optional separately	Default none
Plastic surgery function	Optional separately	Default none
Lifting function	Optional separately	Default none
Foot cutting function	Optional separately	Default none
Adapt to the length of the material pipe	400-600mm	
Adapt to the height of the material pipe	10mm-45mm	
Adapt to the width of the material pipe	10mm-40mm	

### Material pipe style:

(The feeder is customized according to the materials provided by the customer)

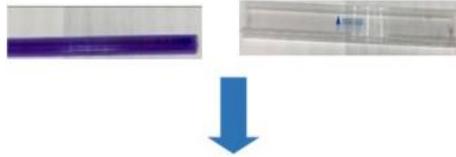

### Finished product:

(The following are some display pictures)



### Custom Solutions Available

For special material dimensions or unique application requirements, contact our engineering team for consultation. We provide customized solutions and exclusive feeder configurations tailored to your specific manufacturing needs.



Global Soul Limited

+8613728696610

liyi@gs-smt.com

smtmachinepart.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China