



## [Hook Type] Radial Feeder (GS-RDD2112)

Our Product Introduction

for more products please visit us on [smtmachinepart.com](http://smtmachinepart.com)

### Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RDD2112
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 900\*90\*300mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



### Product Specification

- Model: GS-RDD2112
- External Dimensions (length\*75\*205(180)mm The Height From The Bottom To The Feeding Port: 180mm Height At The Highest Point (from The Bottom To The Handle) : 205mm
- Weight: 11KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Feeding Speed: 0.6-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen 80\*160 Pixels
- Error In The Length Of The Material Cutting Feet:  $\pm 0.2$ mm
- Applicable To The Hole Spacing Of The Tape: 12.7mm/15mm
- Function Of Cutting Waste Tape: Have



## Product Description

### [Hook Type] Radial Feeder (GS-RDD2112)

The radial feeder is an electronic component supply device that keeps a certain interval and sends out the electronic components of the radial tape packaging one by one at a specified time, cuts the lead wires, and supplies them to the insertion machine.



## Applicable taping styles

(The following are some display pictures)



LED

Resistance

Ferrari supercapacitor

Ceramic capacitor


## Finished product

(The following partial display pictures)



Note: Compatible with two types of materials

Applicable to the specifications of braided tape materials

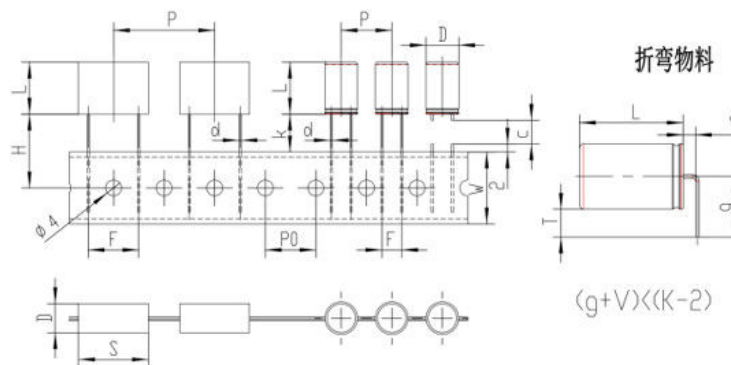

Feeder type		GS-RDD2105 (L)	Remarks
code	explain	Feeder reference material dimensions(mm)	
D	Material width	$\leq 14$	
S	Material length	$\leq 14$	
L	Material height	$\leq 30$	
F	Pin spacing	Standard knife: $\leq 10$	Default standard knife
		Wide knife: 8-13	Optional
		Big knife: 8-23	Optional
d	Pin diameter	The largest 1.0	
PO	Hole spacing	12.7 or 15	Default 12.7
C	Adjustable range of the cutting knife	0-6 (Based on W+2)	
V	The distance from the main body to the bending point	$\geq 1.5$	
K	The distance from braided to the bottom of the main body		
W	Braided tape height	18	
2	The minimum position dimension of the foot cutter	2	The minimum residual exposed size after the pins are cut

If there are special material dimensions, you can contact our company for consultation and to provide solutions and customize exclusive feeders.