



## [Bending] Radial Feeder GS-RDD2105(L)

Our Product Introduction

for more products please visit us on [smtmachinepart.com](http://smtmachinepart.com)

### Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RDD2105(L)
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 850\*85\*170mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



### Product Specification

- Feeder Type: GS-RDD2105 L
- Explain: Feeder Reference Material Dimensions(mm)
- Material Width:  $\leq 14$
- Material Length:  $\leq 14$
- Material Height:  $\leq 30$
- Pin Spacing 1: Standard Knife  $\leq 10$  (Default Standard Knife)
- Pin Spacing 2: Wide Knife 8-13 (Optional)
- Pin Spacing 3: Big Knife 8-23 (Optional)
- Pin Diameter: The Largest 1.0
- Hole Spacing: 12.7 or 15 (Default 12.7)
- Adjustable Range Of The Cutting Knife: 0-6 (Based On W+2)
- The Distance From The Main Body To The Bending Point:  $\geq 1.5$
- Braided Tape Height: 18



### More Images




## Product Description

### [BENDING] VERTICAL FEEDER GS-RDD2105(L)

The Vertical feeder is an electronic component supply device that keeps a certain interval and sends out the electronic components of the Vertical tape packaging one by one at a specified time, cuts the lead wires, and supplies them to the insertion machine.




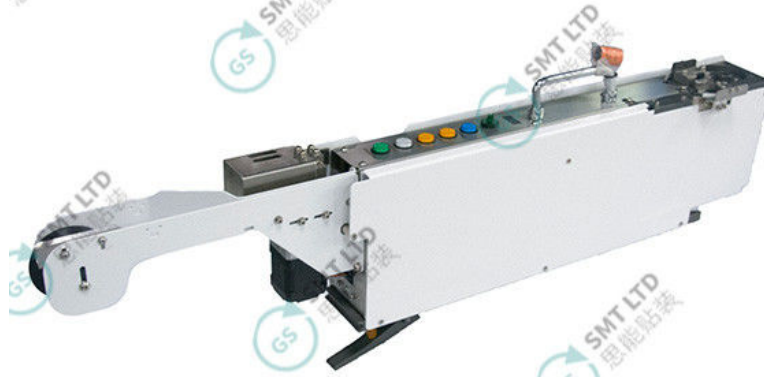

Display at the bend



**Applicable material styles**  
(The following are some display pictures)

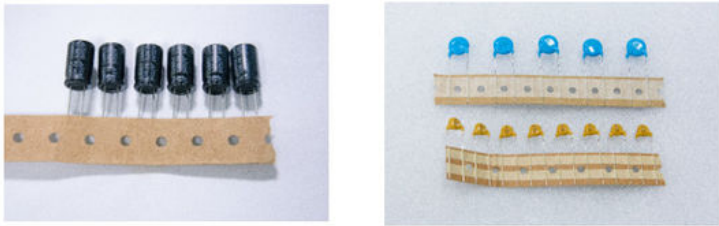

**Finished product**  
(The following partial display pictures)




Note :GS-RDD2105 is the standard model (feeding and cutting) Radial Feeder, GS-RDD2105(L)

**Specifications and Parameters**

Model	GS-RAD2201	Remarks
External dimensions (length * width * height)	750*68*144(110)mm	Width: Depending on the incoming materials provided, the width will increase (the external width will increase the height of the material by one). Gao: Height from the bottom to the handle (the highest point) :144mm The height from the bottom to the feeding port :110mm
Weight	8KG	
Working voltage	DC 24V	
Gas source requirements	no	
Maximum current	3A	
Feeding speed	0.6-2s/Pcs	
Drive mode	Pure electric	
Operation panel	0.96-inch TFT color screen 80*160 pixels	
Error in the length of the material cutting feet	±0.2mm	
Applicable to the hole spacing of the tape	12.7mm/15mm	Parts need to be replaced.
Function of cutting waste tape	have	
Bending function	Optional separately	The bending function can be customized according to the material
The number of times the cutter is used	≥100万	
Tape braiding requirements	K: Distance from the brinell to the bottom of the main body \ nV: Distance from the main body to the bending point \ nG: The bending height required by the product satisfies the formula : $(g+VK-2)$	

Radial feeder is suitable for the specifications of braided materials

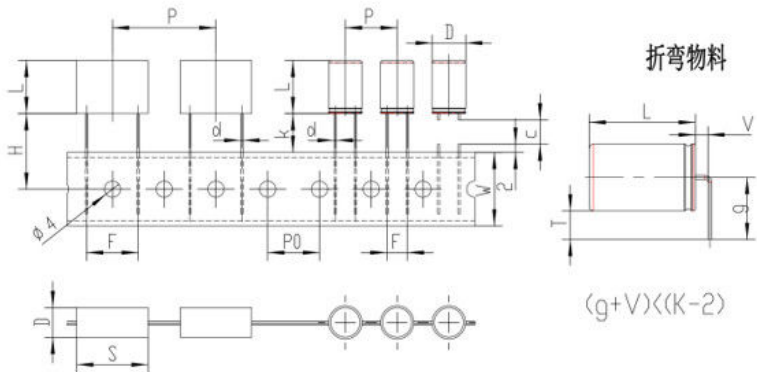

If there are special material dimensions, you can contact our company for consultation and to provide solutions and customize exclusive feeders.



**Global Soul Limited**



+8613728696610



liyi@gs-smt.com



smtmachinepart.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China