



48mm Radial Feeder(GS-RAD2203)-[with cutter]

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RAD2203
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 950*60*180mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



Product Specification

- Model: GS-RAD2203
- External Dimensions (length740*47*144(110)mm(The Height From The Bottom To The Feeding Port: 110cm Height At The Highest Point (from The Bottom To The Handle) : 144mm)
* Width * Height :
- Weight: 6KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Maximum Current: 3A
- Feeding Speed: 0.6-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen 80*160 Pixels
- Error In The Length Of The Material Cutting Feet: ± 0.2 mm
- Applicable To The Hole Spacing Of The Tape: 12.7mm/15mm(Parts Need To Be Replaced)
- Function Of Cutting Waste: Optional/DK RAD2203: With A Cutter DK




Product Description

48mm Radial Feeder(GS-RAD2203)-[with cutter]

The Radial feeder is an electronic component supply device that maintains a certain interval and sends out the electronic components of the Radial tape packaging one by one at a specified time, cuts the lead wires, and supplies them to the insertion machine.



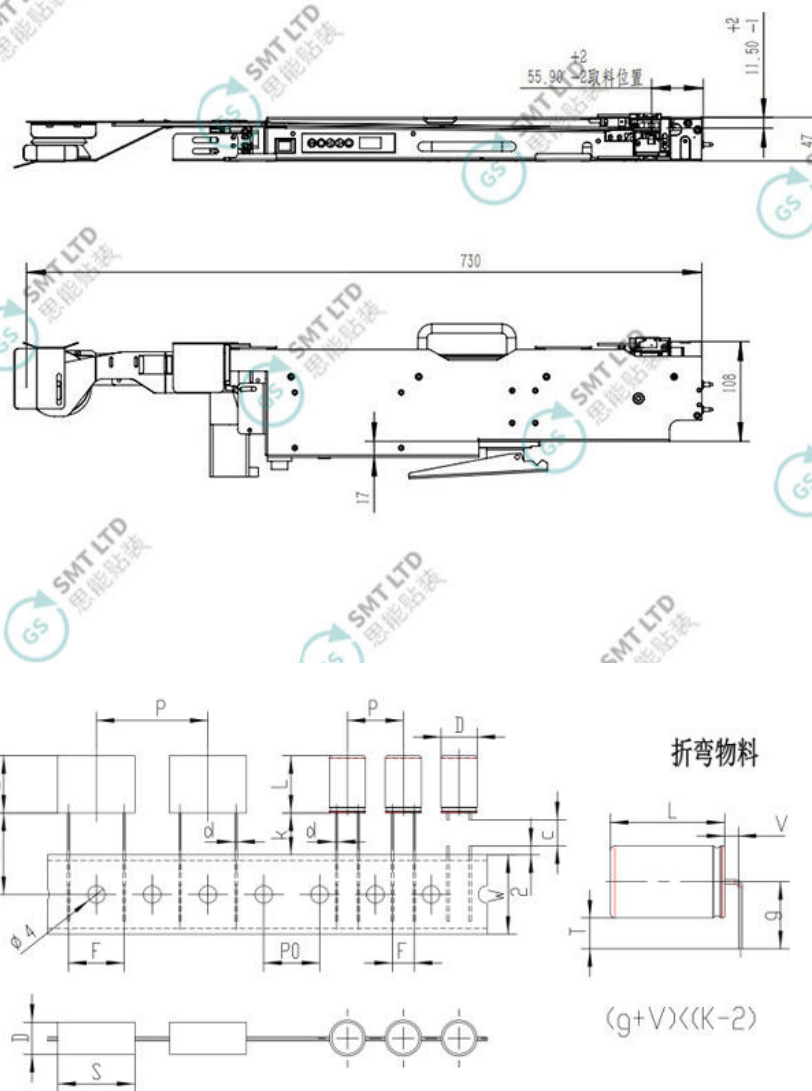

		Feeder type			
		GS-RAD2203	GS-RAD2201		Remarks
code	explain	Feeder reference material dimensions(mm)			
D	Material width	≤11	≤14≤14		
S	Material length	≤14			
L	Material height	≤30	≤30		
F	Pin spacing	Narrow knife: ≤10	Narrow knife: ≤10	Narrow knife: ≤10	Default narrow knife
		Wide knife: 8-13	Wide knife: 8-13	Wide knife: 8-13	Optional
		Big knife: 8-16	Big knife: 8-23		Optional
d	Pin diameter	The largest0.6	The largest1.0		
P0	Hole spacing	12.7or15			Default12.7
C	Adjustable range of the cutting knife	0-6(Based onW+2)			
V	The distance from the main body to the bending point	≥1.5			
K	The distance from braided to the bottom of the main body				
W	Braided tape height	18			
2	foot cutter	2	The minimum residual exposed size after the pins are cut		

If there are special material dimensions, you can contact our company for consultation and to provide solutions and customize feeders.



+8613728696610



liyi@gs-smt.com



smtmachinepart.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China