



## 70mm Vertical Feeder with Cutter for SMT Component Supply Device DC 24V

Our Product Introduction

### Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RAD2201
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 900\*95\*175mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



### Product Specification

- Model: GS-RAD2201
- External Dimensions (length750\*68\*144(110)mm[The Height From The Bottom To The Feeding Port: 110cm Height At The Highest Point (from The Bottom To The Handle) : 144mm]
- Weight: 8KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Maximum Current: 3A
- Feeding Speed: 0.6-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen 80\*160 Pixels
- Error In The Length Of The Material Cutting Feet:  $\pm 0.2$ mm
- Applicable To The Hole Spacing Of The Tape: 12.7mm/15mm(Parts Need To Be Replaced)
- Function Of Cutting Waste: Optional GS-RAD2201: With A Cutter GS



for more products please visit us on [smtmachinepart.com](http://smtmachinepart.com)

## Product Description

### 70mm Vertical Feeder (GS-RAD2201) [With Cutter]

#### Product Overview

The GS-RAD2201 70mm Vertical Feeder is an advanced electronic component supply device designed for large materials. This precision feeder maintains consistent intervals and delivers vertically packaged electronic components one by one at specified times, while cutting lead wires and supplying components directly to insertion machines.

#### Key Features

- 70mm vertical feeder design optimized for large component handling
- Integrated cutter for precise lead wire cutting
- Maintains consistent component spacing and timing
- Automated supply to insertion machines
- Specifically designed for vertical tape packaging components

#### Product Images




### Applicable material style:

(The following are some of the display pictures)



LED



Resistance



Ferrari supercapacitor




Ceramic capacitor

### After plastic surgery:

(The following part shows the pictures)



Note: The 48mm vertical feeder is suitable for taping styles, and the 70mm vertical feeder is equally applicable. The difference compared with the former is that it has a wider compatibility range. It can produce materials with larger bodies and thicker pins.

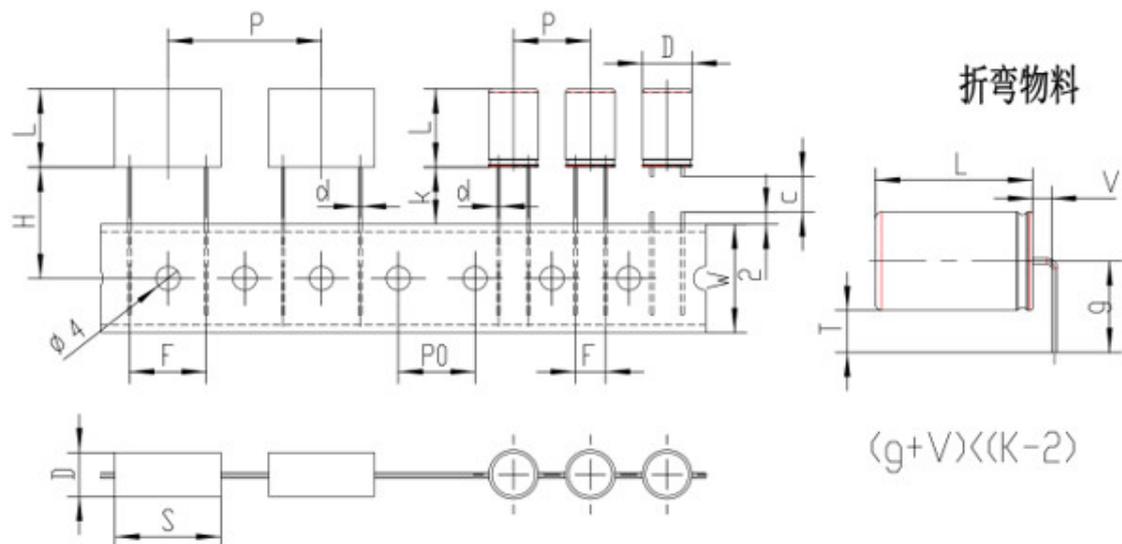

		Feeder type			
		GS-RAD2203	GS-RAD2201	Remarks	
code	explain	Feeder reference material dimensions(mm)			
D	Material width	≤11	≤14		
S	Material length	≤14			
L	Material height	≤30			
F	Pin spacing	Narrow knife: ≤10	Narrow knife: ≤10	Narrow knife: ≤10	Default narrow knife
		Wide knife: 8-13	Wide knife: 8-13	Wide knife: 8-13	Optional
		Big knife: 8-16	Big knife: 8-23		Optional
d	Pin diameter	The largest0.6	The largest1.0		
P0	Hole spacing	12.7or15			Default12.7
C	Adjustable range of the cutting knife	0-6(Base onW+2)			
V	The distance from the main body to the bending point	≥1.5			
K	The distance from braided to the bottom of the main body				
W	Braided tape height	18			
Z	The minimum position dimension of the foot cutter	2		The minimum residual exposed size after the pins are cut	

### Custom Solutions Available

For special material dimensions or unique application requirements, contact our engineering team for consultation. We provide customized solutions and develop exclusive feeders tailored to your specific manufacturing needs.



+8613728696610

liyi@gs-smt.com

smtmachinepart.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China