

Tape Adjustment Feeder(GS-RAZ2211)

Basic Information


Place of Origin: ChinaBrand Name: GS

Model Number: GS-RAZ2211Minimum Order Quantity: 1 PCS

• Price: USD+negotiable+pcs

Packaging Details: 900*650*120
Delivery Time: 1-7 days
Payment Terms: T/T

Supply Ability: 1+pcs+per days



Product Specification

Model: GS-RAZ2211
Weight: 17KG
Working Voltage: Ac 220V
Gas Source Requirements: 0.5MPa

• Maximum Power: 400W(Direct Vibration: 330W)

• Feeding Speed: 1.5s/Pcs

Drive Mode: Electric[Blow Air To Assist In Throwing The

Waste Tape]

• Operation Panel: 0.96-inch TFT Color Screen 80*160 Pixels

Error In The Length Of The ±0.1mm

Material Cutting Feet:

• Applicable To The Hole 12.7mm/15mm[Parts Need To Be Replaced]

Spacing Of The Tape:

Applicable Material Body ≤47mm

Height:


Applicable Material Pin ≤0.8mm


Diamatar

Tape adjustment feeder(GS-RAZ2211)

The vertical feeder is an electronic component supply device that keeps a certain interval and sends out the electronic components of the vertical tape packaging one by one at a specified time, cuts the lead wires, and supplies them to the insertion machine.

Function Introduction

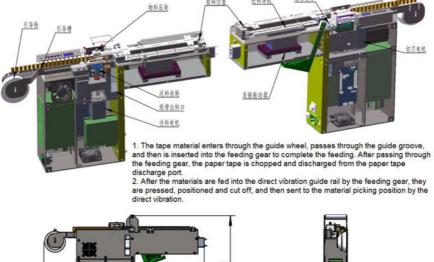









Tape adjustment feeder(GS-RAZ2211)
Schematic diagram of appearance and dimensions (Unit :mm)

Finished product display of tape adjustment feeder (the following partial display pictures):



If there are special material dimensions, you can contact our company for consultation and to provide solutions and customize exclusive feeders.

+8613728696610 Iiyi@gs-smt.com smtmachinepart.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China