



## Customized New Horizontal Feeder K Model (GS-AAD2412)

Our Product Introduction

### Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-AAD2412
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 800\*300\*200mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



### Product Specification




- Model: GS-AAD2412
- Overall Dimensions (length \* Width \* Height Unit Mm): 536\*109\*140.5mm
- Weight: 9KG
- Working Voltage: DC 24V
- Gas Source Requirements: 0.5-0.7Mpa
- Maximum Current: 1.3A
- Feeding Speed: 2s/Pcs
- Drive Mode: Pneumatic
- Operation Panel: 0.96-inch TFT Color Screen, 80\*160 Pixels
- Material Lifting Error:  $\pm 0.4$ mm
- Applicable Tape Width: 63-90 Mm
- Condition: New

for more products please visit us on [smtmachinepart.com](http://smtmachinepart.com)


## K Horizontal Feeder (GS-AAD2412)

[Customized Version]

The horizontal feeder is an electronic component supply device that keeps a certain interval and feeds out the horizontal tape-packed electronic components one by one at the prescribed time, shapes them and cuts the lead wires, and supplies them to the insertion machine.

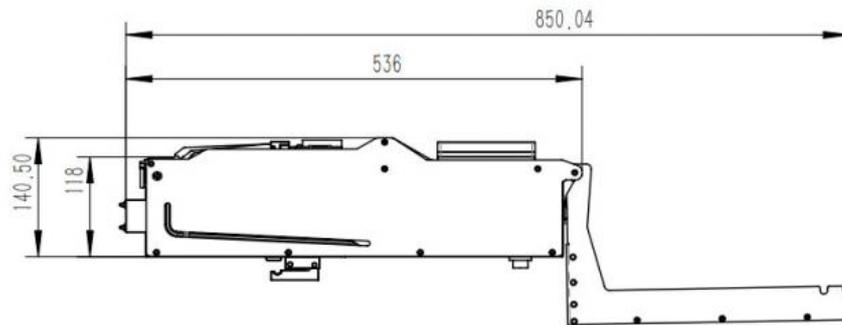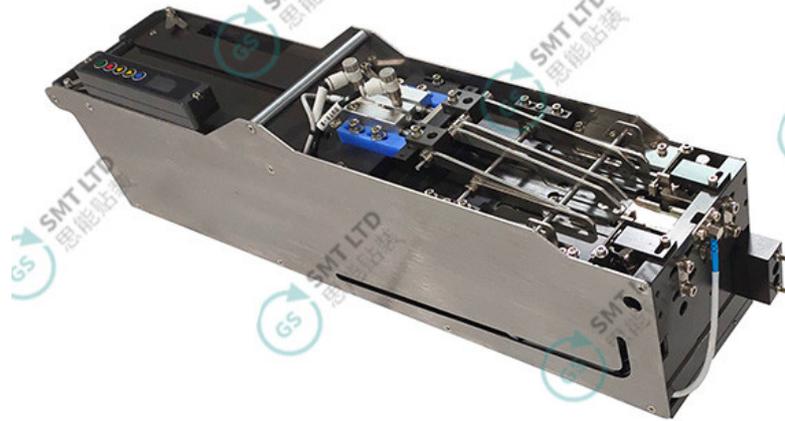

Applicable to the specifications of braided tape materials

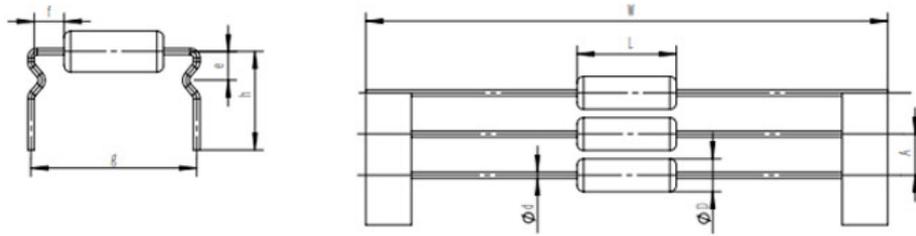

Code name	Explanation	Reference size (mm)
A	Tape spacing	5/10
W	Braided tape width	62-90
L	Ontology length	5-22
D	Ontological diameter	3-8
d	Pin diameter	0.4-0.8
g	Pin span	12-26
h	Bending height	7-12
e	Position of Point k	3.5-6.5
f	The distance from the main body to the bending point	>1.5

If there are special material dimensions, you can contact our company for consultation and to provide solutions and customize exclusive feeders.



 +8613728696610
  liyi@gs-smt.com
  smtmachinepart.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China